

F101 · F121

DUO H FREE STANDING WATER TAP

The Duo H series is a frost-free solution in an exclusive and timeless design. The product is made of glass-blown stainless steel and is prepared so that a garden hose can be mounted on the spout. It is suitable for outdoor areas such as gardens, golf courses, parks and urban spaces, where there is a need for a drinking water-approved outdoor water point that can be used all year round.

DUO H FREE STANDING WATER TAP

Frostline is manufactured in Denmark and today has more than 25 years of experience. We offer a wide range of frost-free outdoor products in beautiful design, high quality and with great functionality.

The park water dispenser works by a self-draining mechanical valve emptying the water dispenser of water after use, which ensures fresh water all year round. Our products do not require the use of electricity to ensure frost-freeness, and are made of stainless steel – so environmentally friendly in every way. The water dispenser is a handle, which provides simple operation and good comfort. The product is delivered complete with well.

We recommend

It is recommended to use a supply water line of PEM pipe of 25mm or larger.

Specifications

Installation target

Tap height	760 mm
Tap depth	146 mm
Stand height	900 mm
Height of handle	795 mm
Height of spout	900 mm
Connection	¾"
Hose connection	½"

Product dimensions

Total height	1820 mm
Total width	191 mm
Well	D160 x 900 mm
Dimension	D25 mm
Good thickness	2 mm

Packaging

Measure H-B-D	184x20x30 cm
Weight	10.5 complete with well

Frostline valve


Capacity (Duo H 30)	28-32 l/min. at 2-4 bar
Capacity (Duo H 9)	6-9 l/min. at 2-4 bar
O-rings	8x3mm NBR - shore 70

Models

Product	plumbing no.	Description
F101	743480.334	Duo H 30 water tap
F101-1	743485.334	Duo H 30 self-closing water tap
F121	743480.344	Duo H 9 water tap
F121-1	743485.344	Duo H 9 water tap self-closing

Options

Product	plumbing no.	Description
F510	743480.926	Duo groove ring D60
F520	743489.936	Lock tube for Duo
F530	743489.916	Quick coupling, glass-blown steel
F921	743489.004	Extension hose with fittings

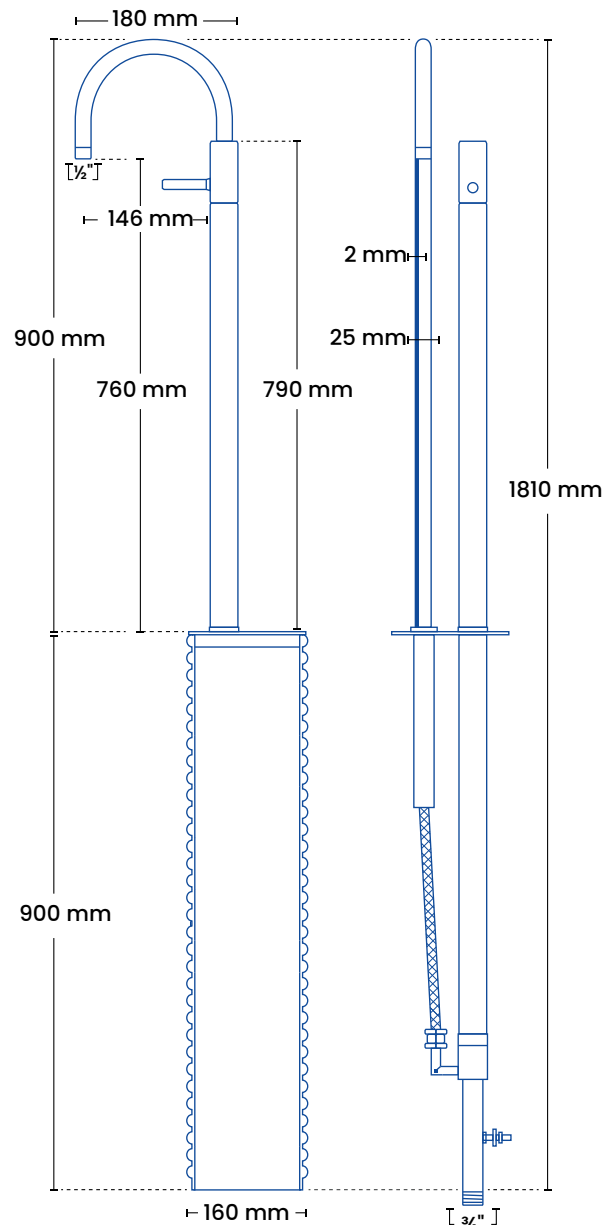

Glass blown



Copper



Polished

Note:

Polished or copper surface must be specially produced.



GODKENDT
TIL DRILLEKVVAND

GDV approval no.:
04/00116

With a well For function and guarantee, there is a requirement for a frost-free water supply all year round, that the well is buried so that the top is in the ground and that the well is dry at all times. Below 5 degrees, no hose nozzles or equipment may be fitted.