


2015

## PRO PUBLIC WALL MOUNTED TAP VALVE

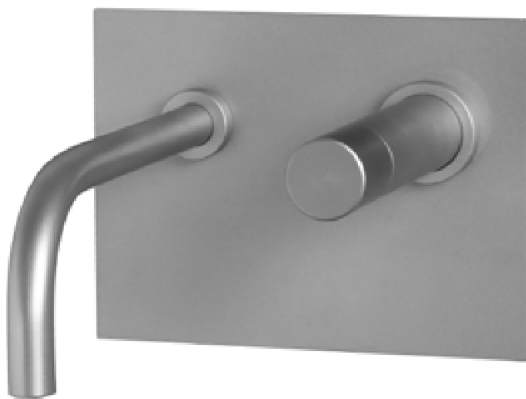

The wall mounted tap from the PRO Public series is suitable for all public places where you need to be able to tap drinking water.

Supplied with the option of the handle as tempo stop, normal push button, classic handle or opening via key. It has an expression that makes it look like a natural part of any facade.

Produced in solid stainless steel and hand assembled in Denmark. Thus, you are guaranteed a frost-free solution that lasts year after year.

# PRO PUBLIC WALL MOUNTED TAP VALVE

Frostline is manufactured in Denmark and today has more than 25 years of experience. We offer a wide range of frost-free outdoor products in beautiful design, high quality and with great functionality. The tap works by a self-draining mechanical valve emptying the product of water after use, so you can shower all year round. Our products do not require the use of electricity to ensure frost-freeness, and are made of stainless steel, so environmentally friendly in every way.

## Important!

For the function, it is important that the pipe which is led through the wall falls 2-3 per mille towards the facade, so that the fixture can be emptied of water.

## Specifications

### Installation target

|                           |                     |
|---------------------------|---------------------|
| Luminaire center distance | 153 mm              |
| Back plate                | W 180 mm x h 140 mm |
| Connection                | ½"                  |

### Product dimensions

|              |         |
|--------------|---------|
| Total height | 140 mm  |
| Total width  | 180 mm  |
| Tappet       | Ø 15 mm |
| Armature     | Ø 27 mm |

### Packaging

|               |                   |
|---------------|-------------------|
| Measure H-B-D | 565 x 200 x 85 cm |
| Weight        | 2.5 kg            |



### Frostline valve

|          |                     |
|----------|---------------------|
| Capacity | 23 l/min. Max 6 bar |
| O-rings  | Gasket set 9010     |

### Models

| Product | plumbing no. | Wall thickness |
|---------|--------------|----------------|
| 2015    | 743468.514   | 180 - 220 mm   |
| 2015    | 743468.544   | 300 - 340 mm   |
| 2015    | 743468.574   | 420 - 460 mm   |

See more variants in the price list.

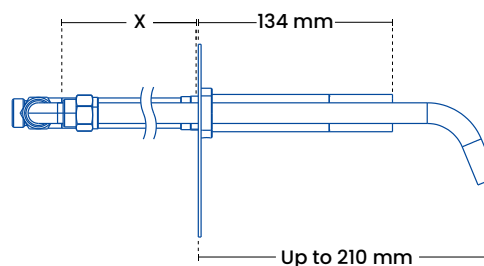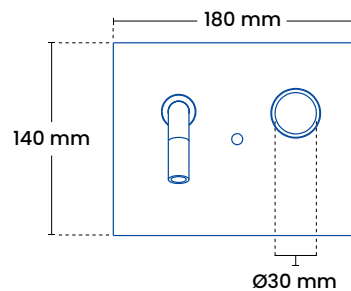

Glass blown

**For wall mounting** For function and warranty, there are requirements for a frost-free water supply all year round, that the product has a fall of at least 3% towards the outer wall and that a product in standard dimensions is used. Below 5 degrees, no hose nozzles or equipment may be fitted.