


**Se næste side for korrekt opmåling**

See the next page for correct measurements.

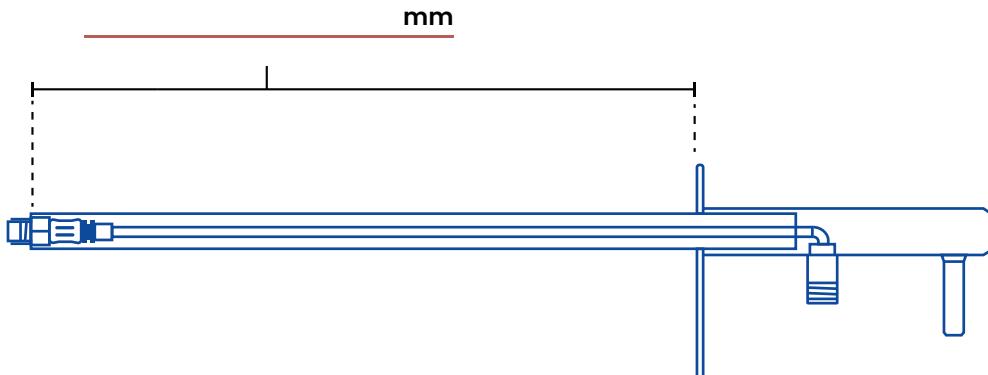

## INFORMATIONER

<b>Navn/Name:</b>				
<b>Firma/Company:</b>				
<b>Telefon/Phone:</b>				
<b>Dato&gt;Date:</b>				
<b>Sagsnr/case no.:</b>				
<b>Rekvisionsnr/Requisition no.:</b>				
<b>Type:</b>	2010 <input type="radio"/>	5032 <input type="radio"/>	F740 <input type="radio"/>	F760 <input type="radio"/>
<b>Produktets farve/The color of the product</b>	<input checked="" type="radio"/> Glasblæst (101) <input type="radio"/> Poleret (02) <input type="radio"/> <input checked="" type="radio"/> Messing (102) <input type="radio"/> Kobber (107 el. 01) <input type="radio"/> <input checked="" type="radio"/> Sort (S) <input type="radio"/>			

Type: 2010 · 5032 · F740 · F760

## EQI & DUO WALL


**SPECIALMÅL TIL FROSTLINE KOBLINGSDÅSE UDEN UNION**  
CUSTOM SIZE FOR FROSTLINE JUNCTION BOX WITHOUT UNION

I forbindelse med tilslutning af Wall til en Frostline koblingsdåse, kan der være behov for at tilkøbe et særligt murmål. Ved at udfylde denne formular sikrer vi at produktet specialproduceres i henhold til de korrekte specifikationer. Murmålet måles fra forkant mur til forkant gevind i dåse.

*When connecting a Wall tap to a Frostline junction box, it may be necessary to purchase a special wall measure. By filling in this form, we ensure that the product is specially produced according to the correct specifications. The brick gauge is measured from the front edge of the brick to the front edge of the thread in the can.*

## Special mål formular

Special measurements form

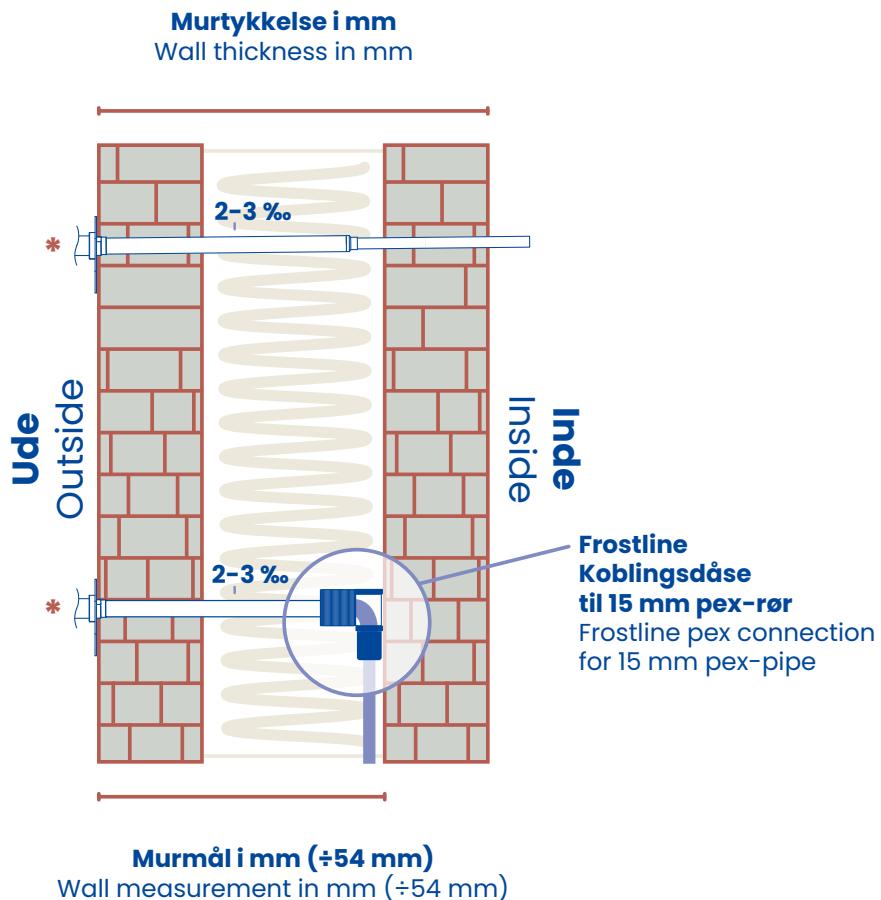

### Ved montering af væghængt med Frostline koblingsdåse

refereres der til et MURMÅL og det skal være helt præcist. Vi leverer en række standardmål fra lager og her har man MAKSIMALT 2 mm tolerance, da disse produkter er udstyret med en union. Passer vores standardmål ikke præcist skal der bestilles et armatur på specialmål. Det opmåles fra ydermur til udvendig side af indermur (mod isolering) og fratækkes 54 mm som Frostline koblingsdåsen fylder frem til forkant gevind. Det er vigtigt at der anvendes en Frostline koblingsdåse, da dette er en særlig type godkendt koblingsdåse, som er tilført et drænhul der sikrer den lovlige tæthed og melding i teknikrummet ved utæthed. Udskifteligheden er sikret via unioner og adgang fra facaden.

Ved opmåling af murmål til montering med Frostline koblingsdåse skal der minimum være 140 mm og maksimalt 460 mm fra forkant af muren til forkant af gevindet i koblingsdåse.

**When mounting a product from the EQI series with Frostline pex connection** reference is made to a WALL MEASUREMENT and it must be absolutely precise. WE supply a number of sizes from stock and here you have a MAXIMUM 2 mm tolerance, as these products are equipped with a union and therefore is unadjustable. If our standard measurements do not fit exactly, a fitting with special measurements must be ordered. It is measured from the outer wall to the inner side of the inner wall (against insulation) and subtracts 54 mm as the Frostline coupling box fills up to the front thread. It is important that a Frostline pex connection is used, as this is a special type of approved pex connection, which is fitted with a drain hole that ensures the legally required tightness and notification in the technical room in the event of a leak. Interchangeability is ensured via unions and access from the facade.

When measuring wall dimensions for installation with the Frostline pex connection, there must be a minimum of 140 mm and a maximum of 460 mm from the front edge of the wall to the front edge of the thread in the pex connection.