



3012

PRO PUBLIC FREE STANDING WATER TAP

The frost free tap from the PRO Public series has been thought through down to the last detail. The tap is foot-operated to ensure ultimate hygienic solution.

It saves the user from having to bend down and is therefore easy to use by everyone.

The tap is assembled by hand in Denmark and produced from solid materials which makes this water source solution perfectly suitable for public spaces.

The surface is made of stained stainless steel and with an aluminum foot operated handle. This variant has a tap height of 663 mm.

PRO PUBLIC FREE STANDING WATER TAP

Frostline is manufactured in Denmark and has over 25 years of experience. We offer a wide range of frost-free outdoor products with beautiful design, high quality, and great functionality. The shower works by using a self-draining mechanical valve to empty the shower from water after use, allowing you to shower all year round.

Our products do not require electricity to ensure frost-free operation and are made of stainless steel, making them environmentally friendly in every way.

The water tap is foot-operated, providing simple operation, good comfort, and hygiene. The product is delivered complete with a well.

Our recommendation

It is recommended to use a supply water line of PEM pipes, 25mm or larger.

Specifications

Installation

Stand height	762 mm
Tap height	663 mm
From center to tap	125 mm
Well	Ø200 mm x 900 mm
Cover	Ø203 mm
Valve depth in well	600 mm (minimum)
Connection	½"

Product dimension

Total height	1668 mm
Total width	203 mm

Packaging


Dimension	1685 x 200 x 200 mm
Weight	9 kg

Frostline valve

Capacity	9 l/min. at 2-6 bar
O-rings	NBR - 70 shore

Models

Product	VVSno.	Description
3012	743477.304	Raw steel

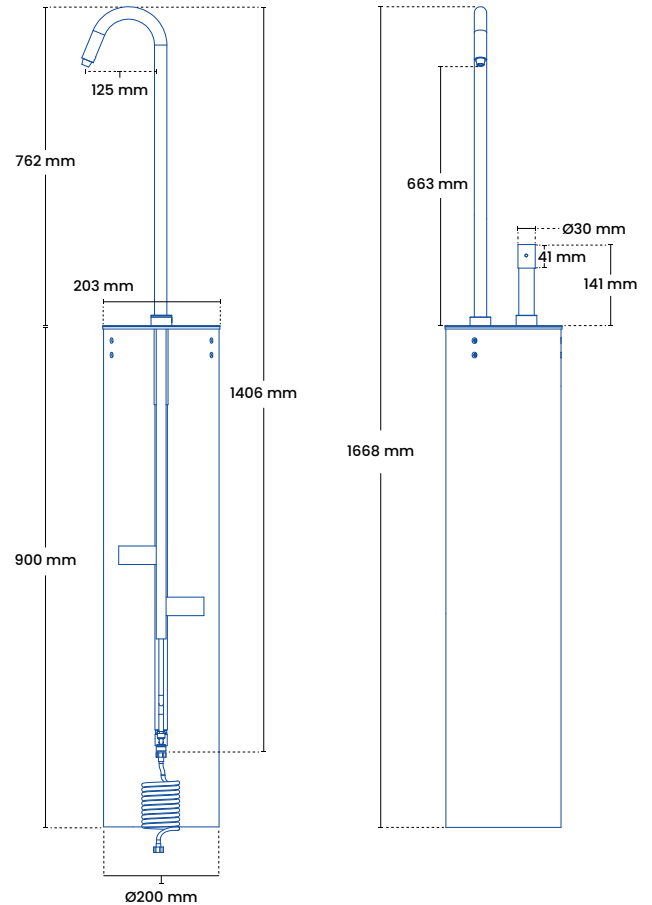

Raw steel

With a well for proper functioning and warranty, there are requirements for a frost-free water supply year-round, the well should be buried so that the top is at ground level, and the well must always be dry. Below 5 degrees Celsius, hose connectors or equipment must not be installed.